
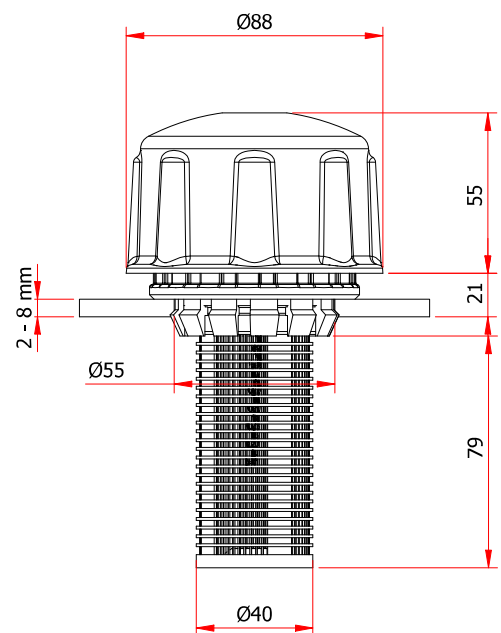


## CTR - FILLER BREATHERS WITH STRAINER – TANK TOP MOUNT

| Code  | Description   |
|-------|---|
| CTR   | Breather without safety chain packed in plastic bag |
| CTR/C | Breather with safety chain packed in plastic bag    |

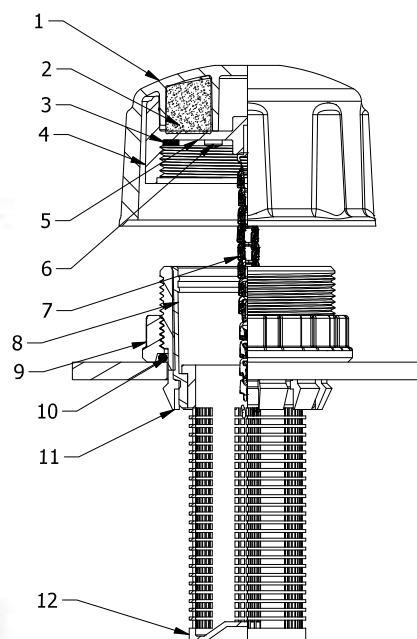

plastic breathers

-Filler breather for tank-top installation with strainer basket: assembly set contains 3 parts.

-**Top cap with breather** made from Polyamide 66 black color.

-Contained in the cap is the air filter made from Polyurethane foam; the cap has internal thread and screws on to the main body, located in the tanks.

-Main body manufactured from technopolymer black color contains threaded locking ring and inside locking ring. The main body is placed in a pre-drilled hole (Ø 55 mm 0,3 mm) on to the tank top.

-Tanktop thickness must be min 2 mm. max 8 mm.

-With this filler breather drilling and tapping of mounting holes is not needed.

-Safety chain available (model CTR/C), which connects the cap to the body, preventing misplacements of the cap when removed.

-**Strainer basket** manufactured from Polypropylene, black color.

-Max operating temperature: **80°C/176 °F**, airflow capacity up to **950 Lt/min** (see graphic pag.57).

-Seal between tank-top and main body: O-Ring 70 shore durometer.

|                            |                            |
|----------------------------|----------------------------|
| 1 Filler breather cap      | 7 Safety chain             |
| 2 Polyurethane air filter  | 8 Quick fastening coupling |
| 3 Inner Cap threaded M60x2 | 9 Locking ring (external)  |
| 4 NBR flat seal            | 10 O-Ring                  |
| 5 Breather holes           | 11 Internal locking ring   |
| 6 Self tapping screw (3x)  | 12 Filtering basket        |