


TCN - OIL FILL PLUGS

TCNS - OIL FILL PLUGS WITH BREATHER HOLE

TSN - OIL DRAIN PLUGS

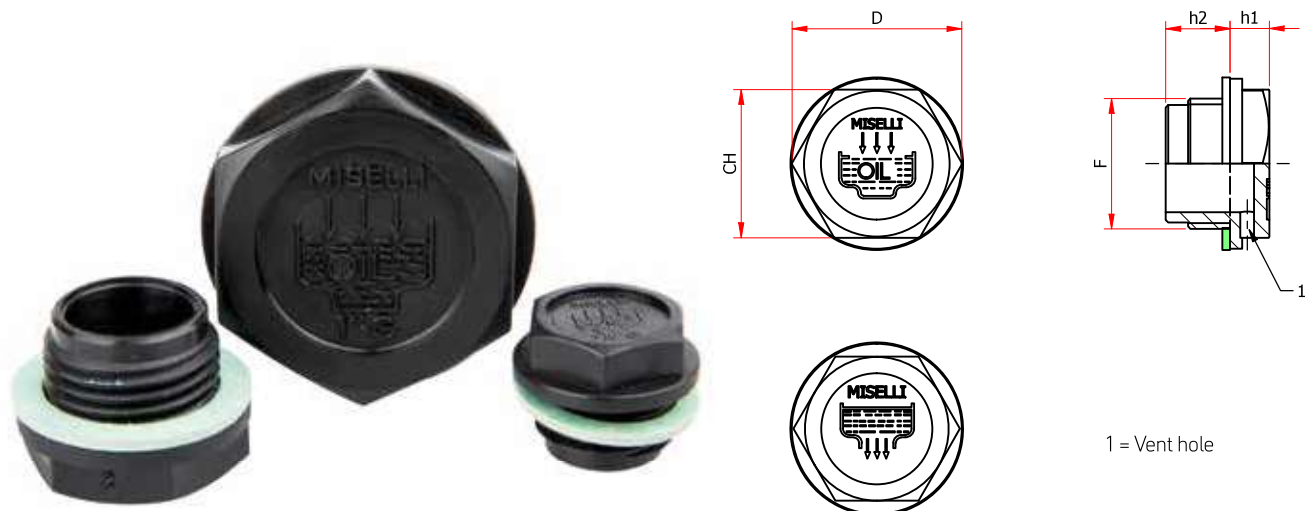

1 = Vent hole

-Hex threaded oil fill plugs in thermoplastic material (Polyamide 66) ensuring high mechanical resistance at both low and high temperature, dimensional stability and shock resistance.

-Operating temperature: **-30°C/-22°F +100°C/212°F.**

-FASIT 202 fiber gasket (NBR rubber seal available on request).

-Standard color: black, red available on request.

-TCN and TCNS style have the "fill" graphic symbol and the word OIL moulded on the top; the model TCNS has a breather hole located on the side of the hex with a diameter from 2 to 3.5 mm, depending on the size.

-Model TSN has a graphic symbol moulded on the top.

-Nm = maximum applicable tightening torque.

* = hex surface blank.

Code			F	Ch	D	h2	h1	Nm
TCN/14	TCNS/14	TSN/14	G 1/4"	17	19,5	9	7	5
TCN/38	TCNS/38	TSN/38	G 3/8"	18	22	10	7,5	8
TCN/12	TCNS/12	TSN/12	G 1/2"	23	28	11	7,5	9
TCN/34	TCNS/34	TSN/34	G 3/4"	30	34	11	9	11
TCN/1	TCNS/1	TSN/1	G 1"	36	42	12	10,5	20
TCN/114	TCNS/114	TSN/114	G 1 1/4"	42	51	13,5	12	n.d.
TCN/112	TCNS/112	TSN/112	G 1 1/2"	50	58	16	10	n.d.
TCN/2	TCNS/2	TSN/2	G 2"	64	74	16	12	n.d.
TCN/10.15*	TCNS/10.15*		M 10x1,5	18	22	9	7	5
TCN/12.15*	TCNS/12.15*		M 12x1,5	18	22	9	7	5
TCN/14.15	TCNS/14.15	TSN/14.15	M 14x1,5	17	19,5	9	7	5
TCN/16.15	TCNS/16.15	TSN/16.15	M 16x1,5	18	21	10	7,5	6
TCN/18.15	TCNS/18.15	TSN/18.15	M 18x1,5	21	26	10	7,5	7
TCN/20.15	TCNS/20.15	TSN/20.15	M 20x1,5	24	28	10	8	8
TCN/22.15	TCNS/22.15	TSN/22.15	M 22x1,5	24	28	11	8	10
TCN/40.15	TCNS/40.15	TSN/40.15	M 40x1,5	42	52	13	10	